



MEG38 JÄTEÖLJYVAUNU IMU/NORM.90L / OIL DRAINER TANK SUCTION/NORMAL

Varaosatunnus / Spare part code MEGV esim. / e.g. MEGV38-8 (-8=pos.no.)

WASTE OIL EXTRACTOR 90L



TRG2090

Pneumatic Oil Pumping(TRG2090)



Volume of Oil Tube:90L
Oil Capacity:<70L
Air pressure when pumping oil:0.1-0.2MPa
Air pressure when expelling oil: \leq 0.05MPa
Vacuum range:0.5-0.76atm
The maximum temperature:70°C
With oil receiving tray.

Pneumatic Oil Pumping(TRG2091)




Volume of Oil Tube:90L
Oil Capacity:<70L
Air pressure when pumping oil:0.1-0.2MPa
Air pressure when expelling oil: \leq 0.05MPa
Vacuum range:0.1-0.2atm
The maximum temperature:70°C

Pneumatic Oil Pumping(TRG2092)




Volume of Oil Tube:90L
Oil Capacity:<70L
Air pressure when pumping oil:0.1-0.2MPa
Air pressure when expelling oil: \leq 0.05MPa
Vacuum range:0.1-0.2atm
The maximum temperature:70°C
With oil receiving tray.

Pneumatic Oil Pumping(TRG2093)

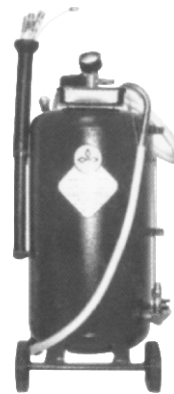

Volume of Oil Tube:90L
Oil Capacity:<70L
Air pressure when pumping oil:0.1-0.2MPa
Air pressure when expelling oil: \leq 0.05MPa
Vacuum range:0.1-0.2atm
The maximum temperature:70°C

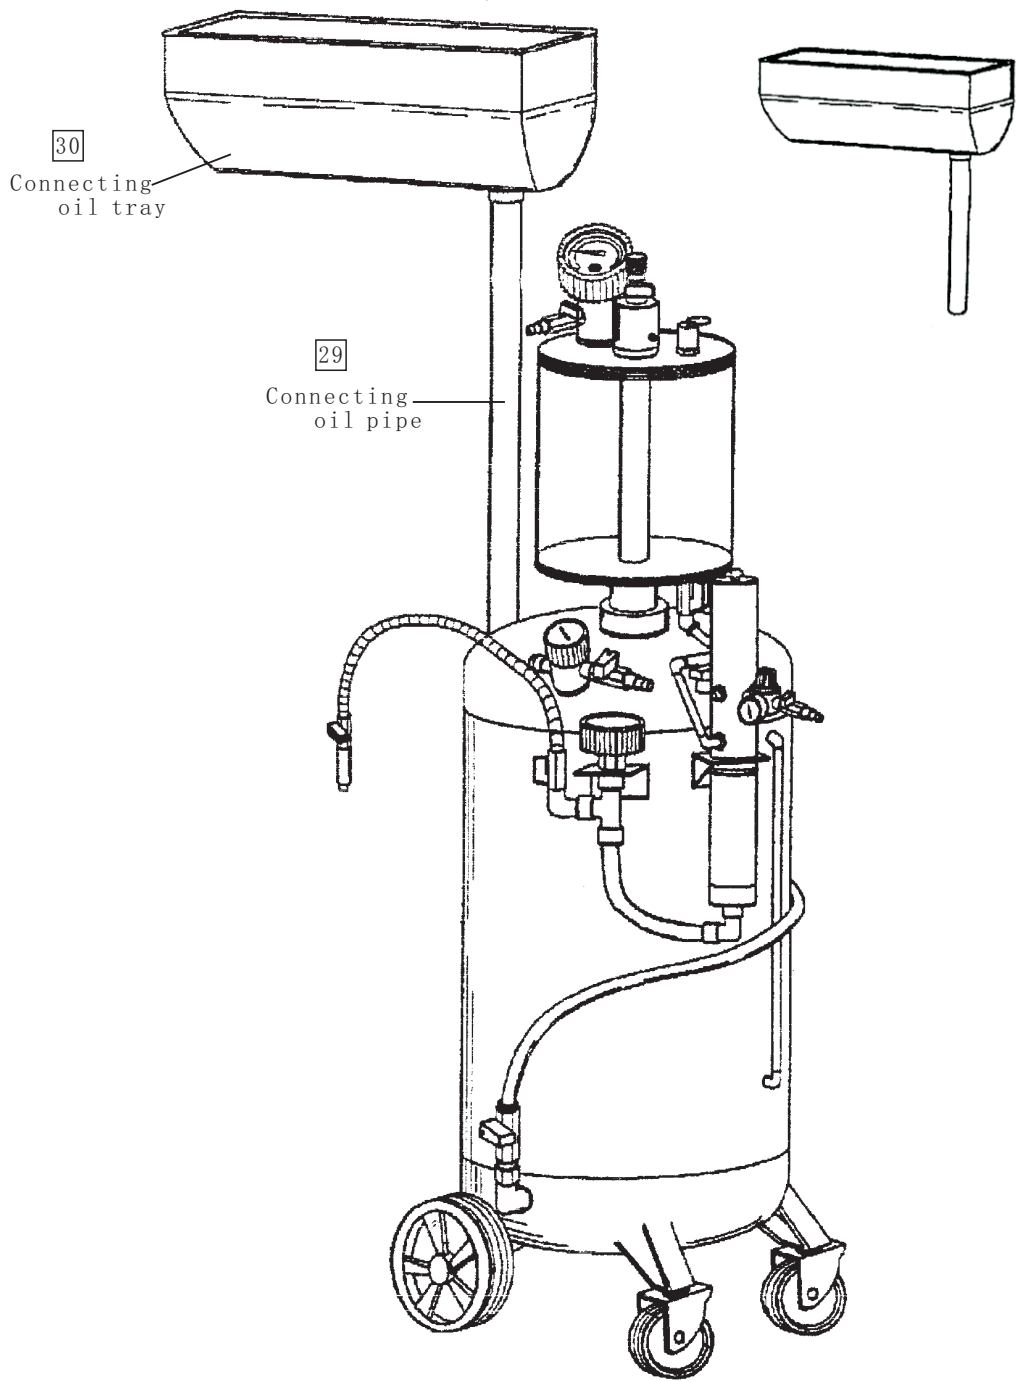

Connecting oil pipe

Connecting oil tray